


Our solder butt connectors combine high quality with a market leading price. Transparent insulation sleeve provides inspect ability, strain relief and insulation. Pre-fluxed solder provides controlled soldering process. One-piece design provides easy installation and lower cost. Colour coded hot-melt rings on two ends of heat shrinkable tube provide precise selection of wire size. They come in packs of 100.

Product Drawings:

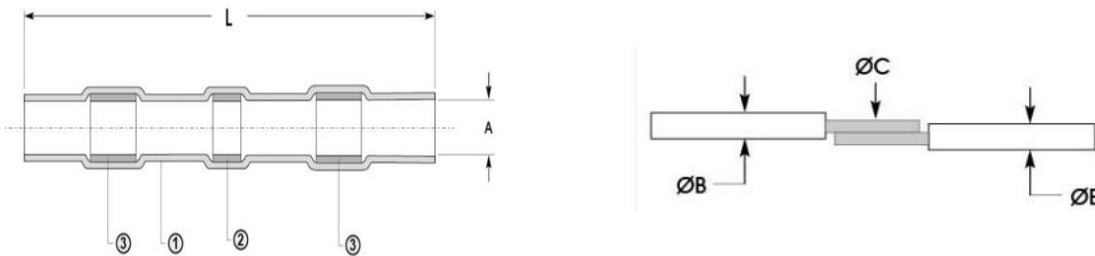

Material Specification:

Material (Item 1) – Radiation cross-linked modified polyolefin
 Material (Item 2) – Solder Ring with flux
 Material (Item 3) – Heat Activated Glue Rings
 Maximum Electrical Rating – 600 Volts Max
 ROHS Compliant - Yes

Dimension Chart:

C Tie Part No	Insulation Colour	L	A Min	Wire Dimensions			Pack
				B Min	B Max C Max	C Min	
CHBCC	Clear (0.25 – 0.5mm ²)	26mm	1.7mm	0.4mm	1.7mm	0.76mm	100
CHBCR	RED (0.5 – 1.5MM²)	40mm	2.7mm	1.3mm	2.7mm	1.2mm	100
CHBCB	BLUE (1.5 – 2.5MM²)	40mm	4.5mm	1.8mm	4.5mm	2.0mm	100
CHBCY	YELLOW (4 – 6MM²)	40mm	6.0mm	2.8mm	6.0mm	3.4mm	100